




The most labor efficient LED downlight on the market is the QLS Edgelit Downlight. Using a metal bracket and base magnets, the Edgelit Downlight can be attached directly to a junction box instantly, without needing a recessed can. The ultra slim design can be used in low ceiling applications, or in areas where there is little room between drywall and stud.

## FEATURES

- PMMA plastic lens cover
- White tapered baffle in unit with ultra slim design
- Smooth, uniform, TRIAC dimming
- Damp location rated
- Life: L70 40,000 Hours
- Mounts directly to junction box with magnetic ring
- E26 or direct wire for quick install

## APPLICATIONS

This product family can be effectively used in any ceiling mount junction box location. Also can be used in low space applications. Commercial, industrial, retail, residential and healthcare applications.

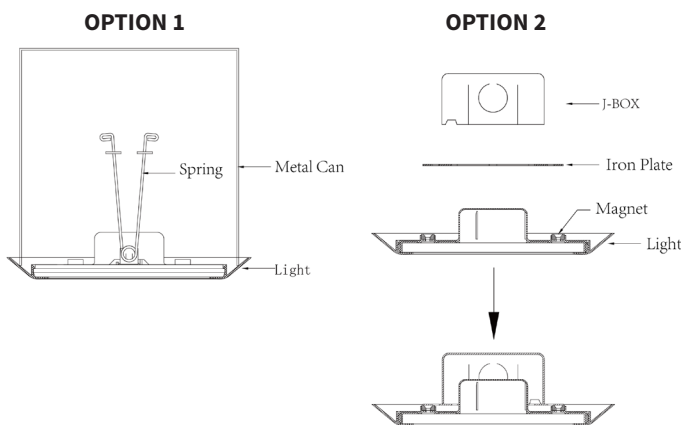

## ITEM NUMBER GUIDE ex. LDDL56D8550E

Family	Size	Dim-mable	Watt	CCT	Energy Star
LDDL	4	D	65	27	E
	56		85	30	
				40	
				50	

↓ ↓ ↓ ↓ ↓ ↓  
**LDDL56 D 85 50 E**

QLS	Watt.	Lumens	Eff L/W	Volt	P.F.	Dim.	CCT	CRI	Case QTY	Watt. Equiv.	Life	Diam. (In)	Depth (In)	Energy Star
LDDL56D8527E	13	1100	85	120	≥0.8	Yes	2700	>80	1	85	40000	7.2	1.4	
LDDL56D8530E	13	1100	85	120	≥0.8	Yes	3000	>80	1	85	40000	7.2	1.4	
LDDL56D8540E	13	1100	85	120	≥0.8	Yes	4000	>80	1	85	40000	7.2	1.4	
LDDL56D8550E	13	1100	85	120	≥0.8	Yes	5000	>80	1	85	40000	7.2	1.4	
LDDL4D6527E	10	650	65	120	≥0.8	Yes	2700	>80	1	65	40000	4.3	1.4	
LDDL4D6530E	10	650	65	120	≥0.8	Yes	3000	>80	1	65	40000	4.3	1.4	
LDDL4D6540E	10	650	65	120	≥0.8	Yes	4000	>80	1	65	40000	4.3	1.4	
LDDL4D6550E	10	650	65	120	≥0.8	Yes	5000	>80	1	65	40000	4.3	1.4	